


E 1532



Druckfeder

Compression spring

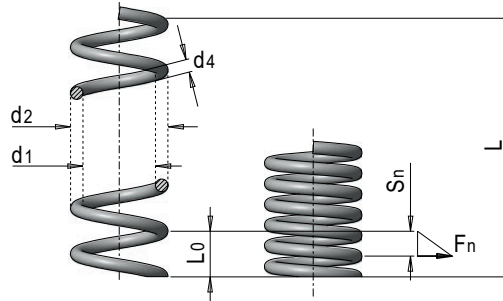

Mat.: 1.1200

DIN EN 10270-1

t max. = 80°C

F_n [N] ¹⁾	S_n ¹⁾	L_0 ¹⁾	d2	d1	d4	L	Nr. / No.
216	2.9	5	15	11	2	500	E 1532/11/2 x 500
388	2.4	5	16		2.5		E 1532/11/2,5 x 500
288	3.9	6.5	20	15	E 1532/15/2,5 x 500		
565	3.2	6.5	21.4		3.2		E 1532/15/3,2 x 500
828	4.4	8.5	28	20	4		E 1532/20/4 x 500
1380	3.4	8.5	30		5		E 1532/20/5 x 500
1140	5.4	10.5	36	26	6.3		E 1532/26/5 x 500
1930	4.1	10.5	38.6				E 1532/26/6,3 x 500
1740	6.1	12.5	44.6	32	8		E 1532/32/6,3 x 500
2870	4.4	12.5	48				E 1532/32/8 x 500

1) F_n , S_n , L_0 : Angabe je Windung / F_n , S_n , L_0 : information indicated per convolution



1 N = 0.1 daN = 0.102 kg