

E 220..



## Kuplung mit Schnellstecktülle

Coupler with quick-fit nozzle



Oil

200°C




Water

150°C



PN


15 bar

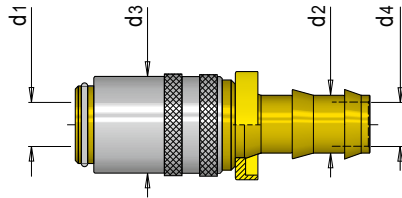

Schlauchgrenzwerte beachten  
Observe hose limits

Messing  
Brass

Edelstahl  
Stainless steel

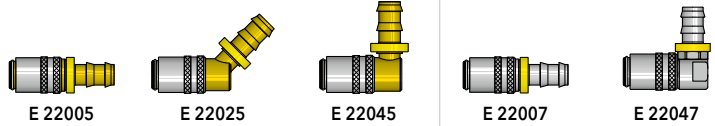

E 22005

E 22025

E 22045

E 22007

E 22047

Mat.: 2.0401 (CuZn)

Mat.: 1.4305

d3	d4	d1	d2	Nr. / No.	Nr. / No.	Nr. / No.	Nr. / No.	Nr. / No.
17	6	9	10	E 22005/ 9/10	E 22025/ 9/10	E 22045/ 9/10	E 22007/ 9/10	E 22047/ 9/10
	7			E 22005/13/13	E 22025/13/13	E 22045/13/13	E 22007/13/13	E 22047/13/13
22	9	13	13					



Weitere Maße finden Sie im Webshop. Weitere Informationen finden Sie im Informationsteil.  
For more dimensions visit the web shop. You can find more information in the information section.



Schnellstecktülle nur mit geeignetem Schnellsteckschlauch kombinieren (E 2185) /  
Use quick-fit nozzle only with suitable quick-fit hose (E 2185)