

E 221..



Kuplung mit Schnellstecktülle verschließend

Shut-off coupler with quick-fit nozzle




200°C



150°C



15 bar

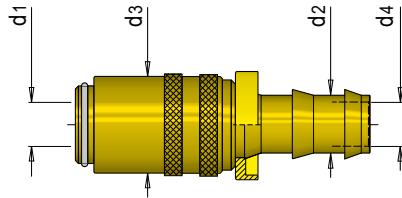


Schlauchgrenzwerte beachten
Observe hose limits



Messing
Brass

Edelstahl
Stainless steel

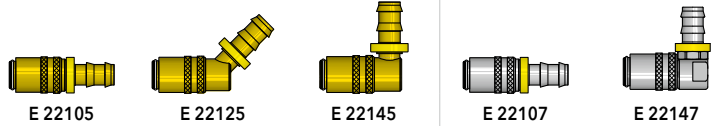

Mat.: 2.0401 (CuZn)

Mat.: 1.4305

d3	d4	d1	d2	Nr. / No.	Nr. / No.	Nr. / No.	Nr. / No.	Nr. / No.
17	6	9	10	E 22105/ 9/10	E 22125/ 9/10	E 22145/ 9/10	E 22107/ 9/10	E 22147/ 9/10
	7			E 22105/13/13	E 22125/13/13	E 22145/13/13	E 22107/13/13	E 22147/13/13
22	9	13	13					

i Weitere Maße finden Sie im Webshop. Weitere Informationen finden Sie im Informationsteil.
For more dimensions visit the web shop. You can find more information in the information section.

i Schnellstecktülle nur mit geeignetem Schnellsteckschlauch kombinieren (E 2185) /
Use quick-fit nozzle only with suitable quick-fit hose (E 2185)