


E 3151



Flachführungsleiste wartungsfrei, mit Schraubenbohrungen

Self lubricating flat guiding rail, with screw holes

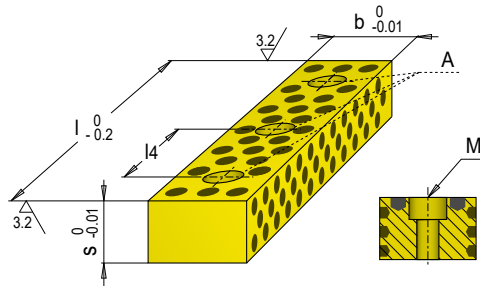

Mat.: 2.0598

≈ 180 HB / Graphit / graphite

0.8/

t max. = 200°C

M	A ¹⁾	l4	b	s	l	Nr. / No.	
M 4	2	24	12	16	40	E 3151/12/16/ 40	
		34			50	E 3151/12/16/ 50	
		47			63	E 3151/12/16/ 63	
M 5	2	34	16	16	50	E 3151/16/16/ 50	
		47			63	E 3151/16/16/ 63	
		32			80	E 3151/16/16/ 80	
	2	34	20	50	E 3151/16/20/ 50		
		47		63	E 3151/16/20/ 63		
		32		80	E 3151/16/20/ 80		
M 6	2	43	20	16	63	E 3151/20/16/ 63	
		60			80	E 3151/20/16/ 80	
		40			100	E 3151/20/16/100	
	3	43	20	63	E 3151/20/20/ 63		
		60		80	E 3151/20/20/ 80		
		40		100	E 3151/20/20/100		
	2	43	25	63	80	E 3151/20/25/ 63	
		60			80	E 3151/20/25/ 80	
		40			100	E 3151/20/25/100	
M 8	2	56	25	16	80	E 3151/25/16/ 80	
		76			100	E 3151/25/16/100	
		125			125	E 3151/25/16/125	
	3	50.5	20	80	E 3151/25/20/ 80		
		76		100	E 3151/25/20/100		
		125		125	E 3151/25/20/125		
	2	56	25	80	E 3151/25/25/ 80		
		76		100	E 3151/25/25/100		
		125		125	E 3151/25/25/125		
	3	50.5	32	80	E 3151/25/32/ 80		
		76		100	E 3151/25/32/100		
		125		125	E 3151/25/32/125		
	M 8	2	76	32	20	100	E 3151/32/20/100
			50.5			125	E 3151/32/20/125
			68			160	E 3151/32/20/160
3		76	25	100	E 3151/32/25/100		
		50.5		125	E 3151/32/25/125		
		68		160	E 3151/32/25/160		
2		76	32	100	E 3151/32/32/100		
		50.5		125	E 3151/32/32/125		
		68		160	E 3151/32/32/160		
3		76	40	100	E 3151/32/40/100		
		50.5		125	E 3151/32/40/125		
		68		160	E 3151/32/40/160		
M10		3	46.5	40	25	125	E 3151/40/25/125
			64			160	E 3151/40/25/160
			84			200	E 3151/40/25/200
	4	46.5	32	125	E 3151/40/32/125		
		64		160	E 3151/40/32/160		
		84		200	E 3151/40/32/200		
	4	46.5	40	125	E 3151/40/40/125		
		64		160	E 3151/40/40/160		
		84		200	E 3151/40/40/200		
M10	3	64	50	32	160	E 3151/50/32/160	
		84			200	E 3151/50/32/200	
		72			250	E 3151/50/32/250	
	4	64	40	160	E 3151/50/40/160		
		84		200	E 3151/50/40/200		
		72		250	E 3151/50/40/250		
M12	3	83	63	40	200	E 3151/63/40/200	
		72			250	E 3151/63/40/250	
	4	93	50	315	E 3151/63/40/315		
		83		200	E 3151/63/50/200		

M	A ¹⁾	l4	b	s	l	Nr. / No.
M12	4	72	63	50	250	E 3151/63/50/250
		93			315	E 3151/63/50/315

1) A: Anzahl Bohrungen / A: Number of holes

